


## High Power Connectors

Available in 15 Amps, 30 Amps, 60 Amps, 125 Amps, 250 Amps and 1000 Amps

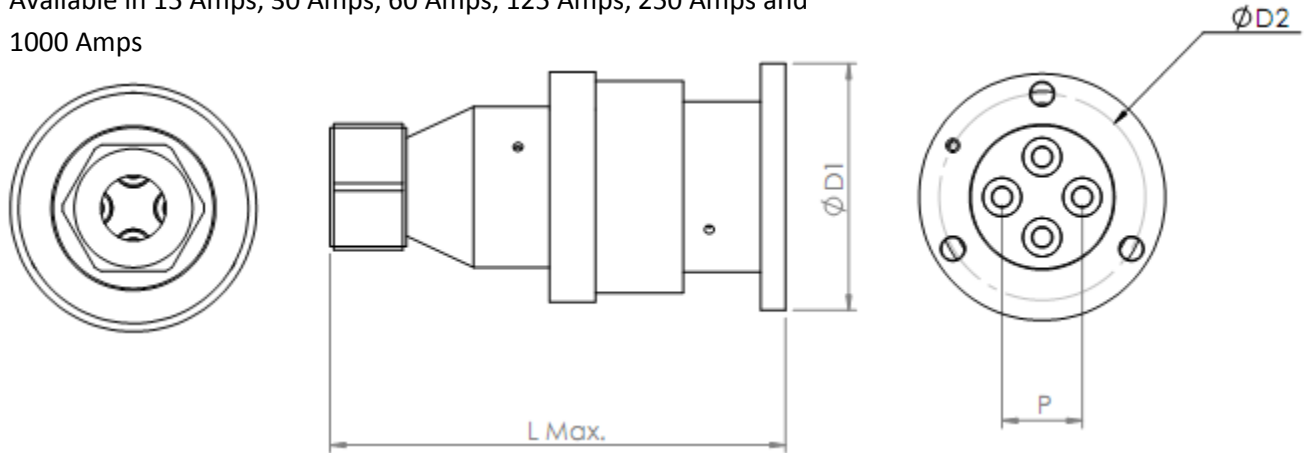

Size	L Max	D1	P	D2	Voltage Rating	Current Rating Each Pin	No. Of Pins	Mating Cycles	Breakdown Voltage	Contact Resistance
15 Amps	123	64.5	21	54	1000 V	15 Amps	4	200	2KV	≥ 5000MOhms
30 Amps	142	80.5	35	70	1000 V	30 Amps	4	200	2KV	≥ 5000MOhms
60 Amps	175	107.5	38	94	1000 V	60 Amps	4	200	2KV	≥ 5000MOhms
125 Amps	268	114.5	37.5	98	1000 V	125 Amps	4	200	2KV	≥ 5000MOhms
250 Amps	256	134	56	118	1000 V	250 Amps	4	200	2KV	≥ 5000MOhms
1000 Amps	396	118	-	-	1000 V	1000 Amps	1	200	2KV	≥ 5000MOhms

Dimension in MM.

Insulator Material: Polycarbonate

Pin Material: Brass with 2 Microns Silver Plated